NSDV-204UK

4 CHANNEL TRIBRID HD-TVI DVR

MAIN FEATURES

Supports 4 channels of HD-TVI or Analog + ability to add 2 additional IP cameras @ 6MP for a total of 6 channels

5MP @ 12 FPS on each channel

4MP @ 15 FPS on each channel

3MP @ 18 FPS on each channel

1080P @ 30 FPS on each channel

Simultaneous HDMI / VGA output

4-ch Synchronous Playback

Smart search for efficient playback

Supports line crossing detection and intrusion detection on all channels, and 2-ch sudden scene change detection.

Alarm I/O: 4/1

Supports 1 Hard Drive, up to 8TB each

Video/Audio input	**Video compression**	H.265+/H.265/H.264+/H.264
	Analog video input	4-ch
		BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
	HDTVI input	5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
	AHD input	1080p25, 1080p30, 720p25, 720p30
	HDCVI input	1080p25, 1080p30, 720p25, 720p30
	CVBS input	PAL/NTSC
	IP video input	2-ch
		Up to 6 MP resolution
		Supports H.265+/H.265/H.264+/H.264 IP cameras
	Audio compression	G.711u
	Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)
	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Video/Audio output	**HDMI/VGA output**	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	Encoding resolution	5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
	Frame rate	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
		Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
	Video bit rate	32 Kbps to 10 Mbps
	Audio output	1-ch, RCA (Linear, 1 KΩ)
	Audio bit rate	64 Kbps
	Dual stream	Support
	Stream type	Video, Video & Audio
	Synchronous playback	4-ch
Network management	**Remote connections**	128
	Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
Hard disk	**SATA**	1 SATA interfaces
	Capacity	Up to 8 TB capacity for each disk
External interface	**Two-way audio input**	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1st audio input)
	Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface
	USB interface	2 × USB 2.0
	Serial interface	RS-485 (half-duplex)
	Alarm in/out	4/1
General	**Power supply**	12 VDC
	Consumption (without HDD)	≤ 10 W
	Working temperature	-10 ºC to +55 ºC (+14 ºF to +131 ºF)
	Working humidity	10% to 90%
	Dimensions (W × D × H)	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)
	Weight (without HDD)	≤ 1.16 kg (2.6 lb)

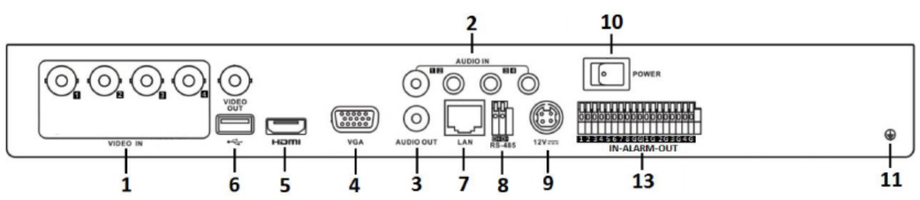

Index	Description	Index	Description
1	VIDEO IN	**8**	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	**9**	12 VDC Power Input
3	AUDIO OUT, RCA Connector	**10**	Power Switch
4	VGA Interface	**11**	GND
5	HDMI Interface	**12**	VIDEO OUT
6	USB Interface	**13**	Alarm In/Out
7	LAN Network Interface		