

XVR302-08U3



Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable(only for TVI cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 8-channel BNC input
- Support 1-ch CVBS output, 1-ch VGA output, 1-ch HDMI output at up to 4K(3840 x 2160)
- HDMI and VGA simultaneous output
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols


Specifications

Model	XVR302-08U3
Video/Audio Input	
Analog Video Input	8-ch, BNC
IP Video Input	8-ch (only IP up to 16ch), each channel up to 8MP
Supported Analog Camera Types	<p>Support AHD input:</p> <p>8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps</p> <p>Support TVI input:</p> <p>8MP@15fps 5MP@20ps 4MP@30fps 1080P@30fps 720P@30fps</p>


	Support CVI input: 8MP@15fps 5MP@25ps 4MP@30fps 1080P@30fps 720P@30fps Support CVBS input	
Audio Input	4-ch, RCA	
Audio Compression	G.711U	
Video/Audio Output		
CVBS Output	1-ch, BNC	
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	4K(3840X2160)/30Hz,1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz,1024x768/60Hz	
Audio Output	1-ch, RCA	
Synchronous Playback	16-ch	
Live view display	HDMI/VGA: 1/4/6/8/9/16	
Two-way Audio	1-ch, RCA	
Snapshot		
FTP/Schedule/Event Snapshot	16-ch snapshot, up to 704*576 resolution	
Network		
Incoming Bandwidth	80 Mbps (Up to 96 Mbps after all analog channel conversion)	
Outgoing Bandwidth	160 Mbps	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP	
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome(version 45 and above) for Windows Edge(version 79 and above) for Windows	
Encoding		
Recording Resolution	8MP/5MP/4MP/1080P/720P/D1	
Recording Frame Rate	Main stream	Sub stream
	8MP@8fps	D1@8fps
	5MP@12fps	D1@12fps
	4MP@15fps	D1@15fps
	1080P@25fps	D1@25fps
	720P@30fps	D1@30fps
Audio Sample Rate	8KHz,16 bit per channel	
Audio Bit Rate	64Kbps per channel	
Decoding		
Capability	Analog: 8 x 8MP @8, 8x 5MP @12, 8x 4MP @15, 8x 1080P@25, 8 x 720@30 IP: 16 x 720P@30, 8 x 1080P@30, 4 x 4MP@30, 2 x 8MP@30	
Hard Disk		

SATA	2 SATA interfaces
Capacity	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)
Smart Alarm	
VCA Detection	Ultra Motion Detection(UMD) for analog:8-ch
VCA Search	Behavior Search
General Alarm	
General Alarm	Motion detection
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
External Interface	
Network Interface	1RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0
Serial Interface	1 x RS485
Alarm In	8
Alarm Out	4
General	
Power Supply	12V DC Power Consumption: ≤ 12 W(without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	380mm ×326mm× 53mm (15" × 12.8"×2.1")
Weight (without HDD)	≤2.0 Kg (4.4lb)
Certification	
Certification	UL /CE /FCC /RoHS /WEEE

Dimensions

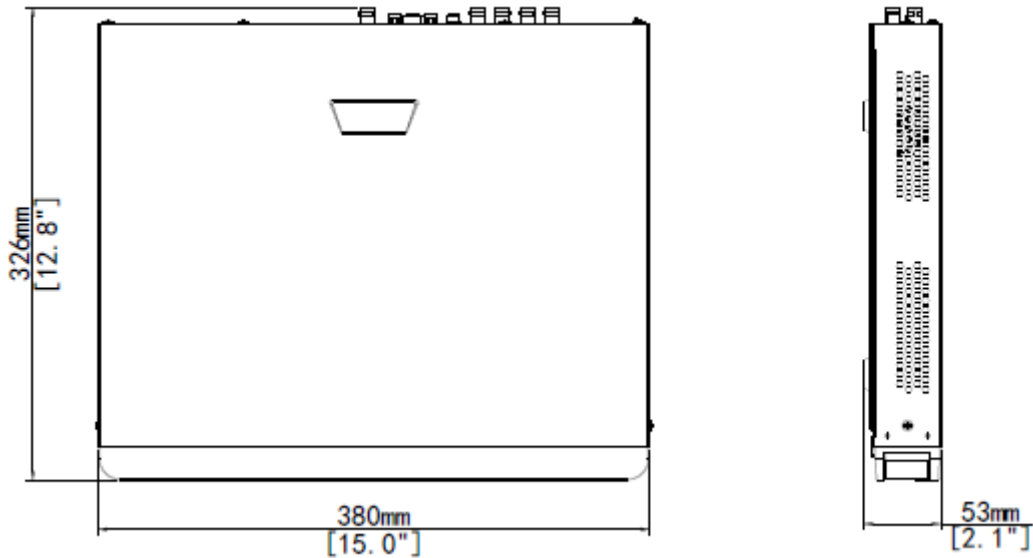

Rear Panel

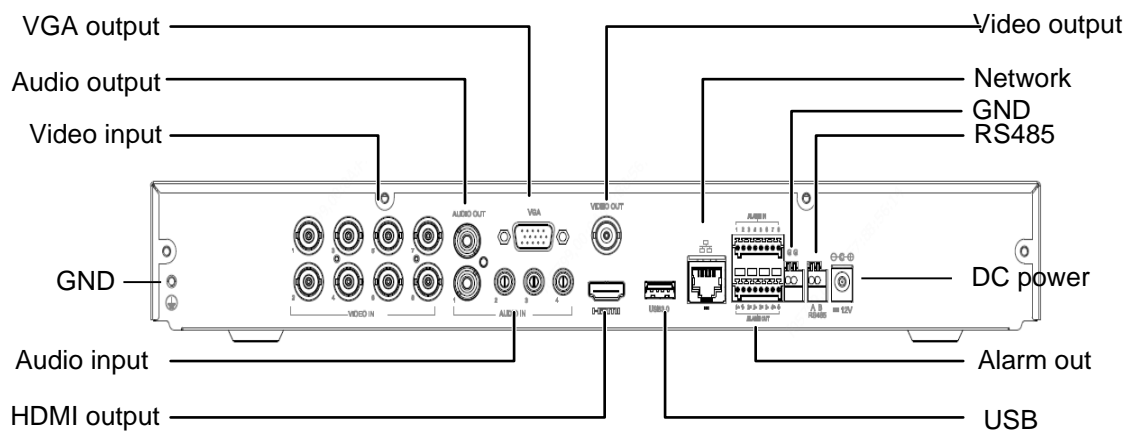

Zhejiang Uniview Technologies Co., Ltd.

No.369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.